

RLF-1507

1" LED MICRO TRIMLESS
RECESSED DOWNLIGHT



Fixture Type
Project
Notes



RLF-1507-RTL-SW5-WH

RLF-1507-RTL-SW5-WH complete set

LED Micro Trimless Downlights series is designed for residential and commercial spaces. Round mud-in trim and remote driver included with the light engine. 5-level field selectable color temperature. Power supply rated for feed through wiring.



SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	7 W
LUMENS	500 Lm
EFFICACY	71 Lm/W
CRI	90+
BEAM ANGLE	38°
DIMMING ¹	TRIAC Dimming
CUT-OUT	2-1/2" Ø

RATINGS	IC, Airtight
ENVIRONMENT	Indoor Wet
CERTIFICATIONS	cETLus, T24 Compliant
LUMEN MAINTENANCE	50,000 hours
INCLUDES	Mud-in flange and remote driver
WARRANTY ²	5 years

¹ Effectively dim down to 10%

² See published warranty terms for detailed information


PERFORMANCE

CCT selectable via switch on heatsink

COLOR TEMPERATURE ³	LUMEN ⁴	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) ⁵	500 Lm	7 W	71 Lm/W	90+

^{3,4} CCT within +/-10%

⁵ Switchable CCT

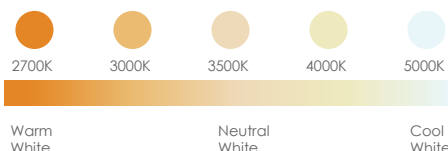

ORDERING INFO

Light Engine with LED, Mud-in Flange and Remote Driver



MODEL	CCT / CRI	FINISH
RLF-1507-RTL	SW5	WH
	SW5 - Switchable CCT (27/30/35/40/50) / 90 CRI	WH - White


RLF-1507

1" LED MICRO TRIMLESS
RECESSED DOWNLIGHT



Fixture Type
Project
Notes

TECHNICAL DRAWING

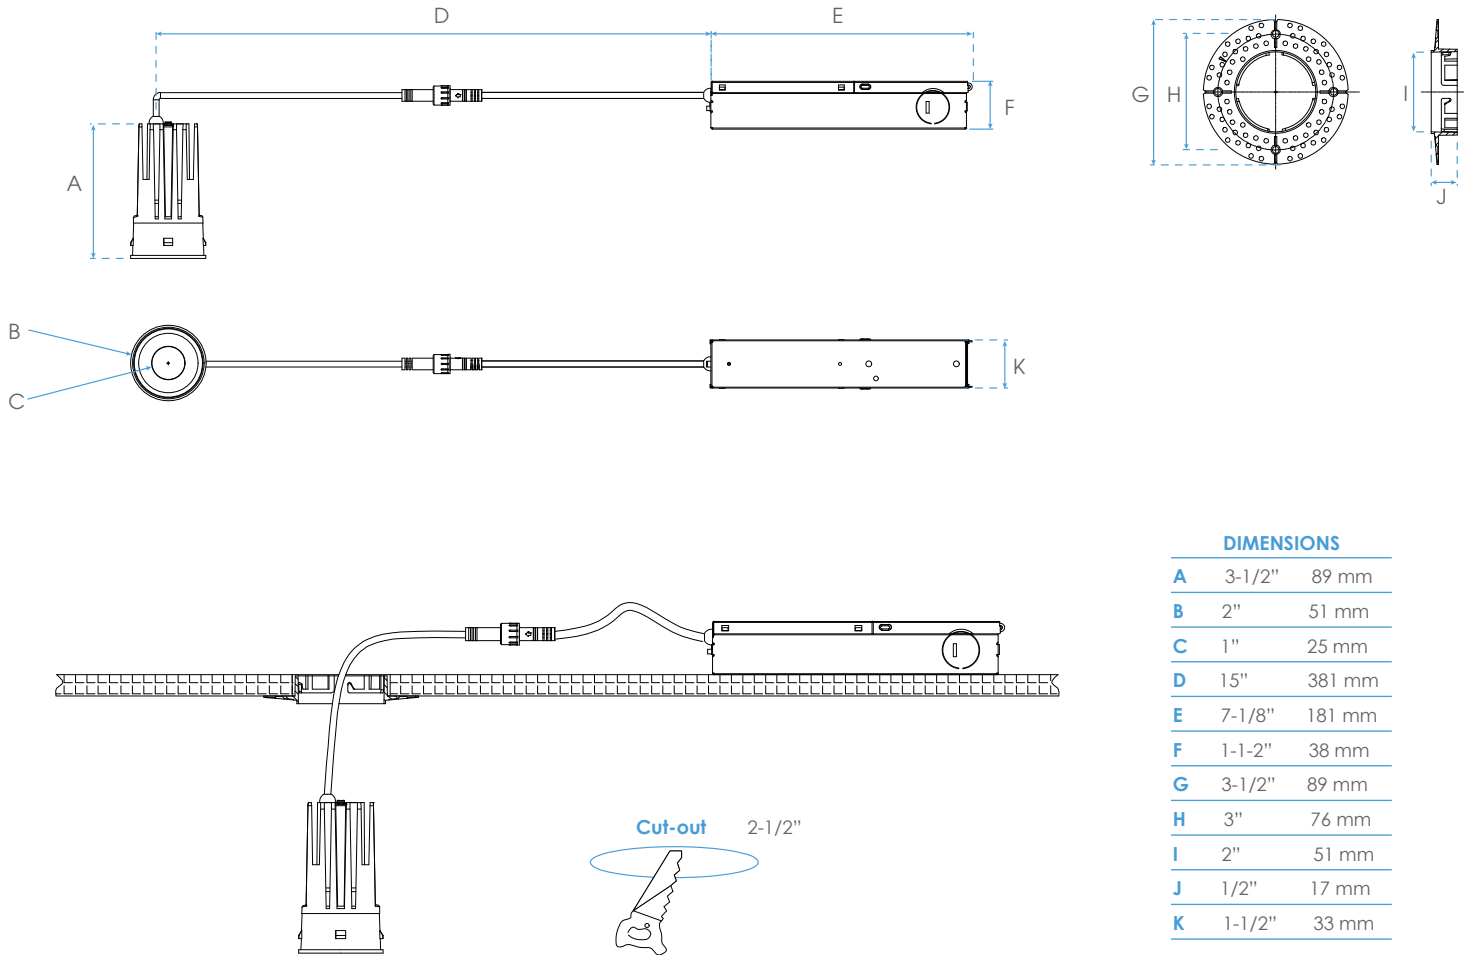

COMPATIBLE DIMMERS

COOPER	SI06P
LEVITON	6621, 6672, IPL06-10Z
LUTRON	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P